




### AC12635

### 2G Sw. Safety Skt + USB's

- 1.3mm decorative flat plate
- Clear gasket fitted to assist with uneven walls
- 3 pin safety shuttered socket outlets. All 3 pins of the plug must be inserted for the shutters to open
- Brushed stainless finish
- Black insert
- Type A & Type C USB outlets provided
- Independent Charging: 5V DC, 4.2A – USB Type A (2.4A), USB Type C (3A)
- Fits on to 35mm deep backbox
- The USB circuits within this socket outlet are designed to withstand insulation resistance tests at 500V

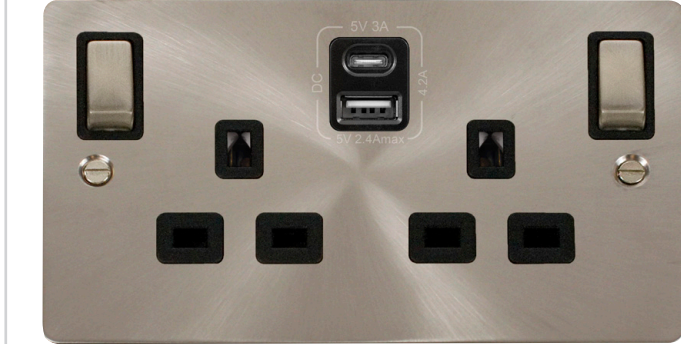

#### Technical Specification

Plate Dimensions	146mm (W) x 88mm (H) x 1.3mm (D)
Maximum Voltage	250V~ 50Hz
Load Rating	13A
Fixing Centres	120.6mm
Terminal Torque	1.2Nm
Terminal Capacity	3 x 2.5mm <sup>2</sup> or 2 x 4mm <sup>2</sup>
Single Pole	Yes
Twin Earth Terminals	Yes
USB Charging Output	5V DC, 4.2A Total
USB Type	USB Type "A" & Type "C"
USB Standby Current	2mA
Product Markings	DC, 5V 3A, 5V 2.4A max, 4.2A
Operational Temp.	-5°C to +40°C
Warranty	10 Years, 1 Year Electronics

**1-AC12635-2021-V1**