


## 2 - Cable Accessories and Sundries



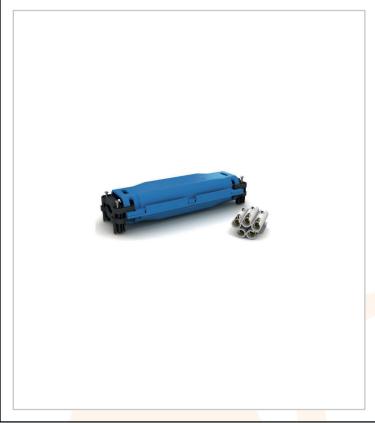

| <b>Technical Specification</b> |       |
|--------------------------------|-------|
|                                |       |
| Attribute                      | Value |
|                                |       |
|                                |       |
|                                |       |
|                                |       |
|                                |       |
|                                |       |
|                                |       |
|                                |       |
|                                |       |
|                                |       |
|                                |       |
|                                |       |

## AC22065

## **SH506W CLASSIC SERIES**

Features and benefits
Material Polyamide

**Filling Silicone** 

Temp. range min -20 °C

Temp. range max 90 °C

Glow wire test self-extinguishing

Voltage 0,6 kV - 1 kV

Terminals/poles  $3 - 5 \times 1,5 - 6 \text{ mm}^2$ 

Quantity of cable 3 - 5

Ampere: 80

Cable Size: (5 core) 1.5 - 6 mm

LxBxH: 55x146x35mm

SHARK Pre-filled gel insulated straight joint. Includes retention clamp, earth braid and constant force roll springs. Perfect for steel wired armour cable.

Ready to use, re-enterable, no mixing or pouring, immediate operation, excellent electrical insulation, good mechanical strength, no expiry date.

2-AC22065-2022-V1

