




4 - Lamps & Lighting



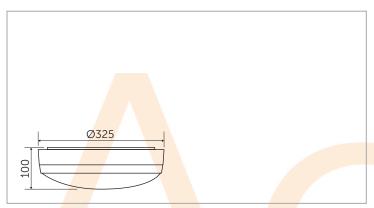

| Technical Specification | | | |
|---|--|--|--|
| Power | 13W | | |
| Construction | Polycarbonate Body and lens | | |
| Driver | BELL | | |
| LED Chip | Samsung | | |
| IP Rating | IP65 | | |
| Operating Temp | -20°C to +35°C | | |
| Input Voltage | 220 - 240V | | |
| Power Factor | > 0.9 | | |
| CRI | 85 - Exceeds EU standard of Ra 80 for Colour Rendering Index | | |
| LMR | 80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio | | |
| Colour Temp | 4000K | | |
| Lumens | 1200 | | |
| Energy Savings | 53% | | |
| Life | 35000 Hours | | |
| Exceeds EU standard of 70 for Lumens Maintenance Ratio Exceeds EU standard of RA 80 for Colour Rendering Index Coloraba sender and the sender of RA 80 for Colour Rendering Index | | | |

AC440126

LED Bulkhead

This LED Bulkhead is the latest addition to the bulkhead family. Suitable for BESA box, side and rear entry, a versatile solution for commercial premises.

- The smart replacement for 28W 2D Fittings
- No lamp replacement
- No maintenance
- Opal diffuser
- 35000 hour life
- Ø325 mm x 101 mm
- Sealed durable fitting
- Suitable for BESA box, side and rear entry

| Code | CCT (K) | Lumens | Description |
|------------------------|---------|--------|---|
| AC440 <mark>126</mark> | 4000 | 1200 | 13W LED Bulkhead White w/Opal Diffuser |

















4_AC440126_2021_V1

