




4 - Lamps & Lighting



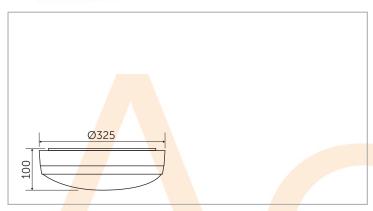

Technical Specification				
Power	13W			
Construction	Polycarbonate Body and lens			
Driver	BELL			
LED Chip	Samsung			
IP Rating	IP65			
Operating Temp	-20°C to +35°C			
Input Voltage	220 - 240V			
Power Factor	> 0.9			
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index			
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio			
Colour Temp	4000K			
Lumens	1200			
Energy Savings	53%			
Life	35000 Hours			
Exceeds EU standard of 70 for Lumens Maintenance Ratio Exceeds EU standard of RA 80 for Colour Rendering Index				

AC440127

LED Bulkhead

This LED Bulkhead is the latest addition to the bulkhead family. Suitable for BESA box, side and rear entry, a versatile solution for commercial premises.

- The smart replacement for 28W 2D Fittings
- No lamp replacement
- No maintenance
- Opal diffuser
- 35000 hour life
- Ø325 mm x 101 mm
- Sealed durable fitting
- Suitable for BESA box, side and rear entry

Code	CCT (K)	Lumens	Description
AC440127	4000	1200	13W LED Bulkhead E <mark>merge</mark> ncy White w/Opal Diffuser

















4_AC440127_2021_V1

