




## 4 - Lamps & Lighting



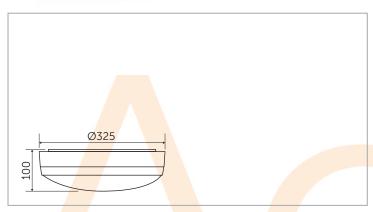

| Technical Specification   |  |  |  |
|---|--|--|--|
| Power   | 13W  |  |  |
| Construction  | Polycarbonate Body and lens                                  |  |  |
| Driver  | BELL   |  |  |
| LED Chip  | Samsung  |  |  |
| IP Rating   | IP65   |  |  |
| Operating Temp  | -20°C to +35°C   |  |  |
| Input Voltage   | 220 - 240V   |  |  |
| Power Factor  | > 0.9  |  |  |
| CRI   | 85 - Exceeds EU standard of Ra 80 for Colour Rendering Index |  |  |
| LMR   | 80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio  |  |  |
| Colour Temp   | 4000K  |  |  |
| Lumens  | 1200   |  |  |
| Energy Savings  | 53%  |  |  |
| Life  | 35000 Hours  |  |  |
| Exceeds EU standard of 70 for Lumens Maintenance Ratio Exceeds EU standard of RA 80 for Colour Rendering Index Subject to terms frografitions |  |  |  |

## AC440129

## **LED Bulkhead**

This LED Bulkhead is the latest addition to the bulkhead family. Suitable for BESA box, side and rear entry, a versatile solution for commercial premises.

- The smart replacement for 28W 2D Fittings
- No lamp replacement
- No maintenance
- Opal diffuser
- 35000 hour life
- Ø325 mm x 101 mm
- Sealed durable fitting
- Suitable for BESA box, side and rear entry

| Code                   | CCT (K) | Lumens | Description   |
|------------------------|---------|--------|---|
| AC4401 <mark>29</mark> | 4000    | 1200   | 13W LED Bulkhead E <mark>merge</mark> ncy M/W Sensor<br>White w/Opal Diffuser |

















4\_AC440129\_2021\_V1

