




4 - Lamps & Lighting



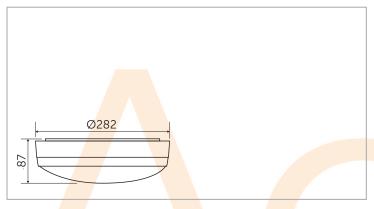

-	
/	
Technical Specific	eation
Power	14W
Construction	Polycarbonate Body and lens
Driver	BELL
LED Chip	Samsung
IP Rating	IP65
Operating Temp	-20°C to +35°C
Input Voltage	220 - 240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMD	20 - Evenede Ell standard of 70 for Lumons Maintenance Patio

AC446107

LED Amenity Bulkhead

The LED Amenity Bulkhead is available in a variety of wattages, sizes, and finishes making this luminaire ideal for all amenity applications. This cost-effective bulkhead offers 50% energy saving on standard compact fluorescent units.

- Ideal for all amenity applications
- Polycarbonate shatterproof construction
- 20mm Conduit entry
- 20mm side & rear entry conduit

	Code	CCT (K)	Lumens	Description	
	AC446 <mark>107</mark>	4000	1500	14W LED Bulkhead, Black w/Clear Bezel	
	YEAR PORT OF THE PROPERTY OF T	Thainte are to the second seco	Render to la de la	Dust Property Propert	
	Stact Us co	IK8 Rating			
ndering Index					
tenance Ratio					

4_AC446107_2021_V1



4000K

1500 50%

¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio ² Exceeds EU standard of RA 80 for Colour Rendering Index

30000 Hours

Colour Temp Lumens

Energy Savings

3 Subject to terms & conditions