



Ø282

87

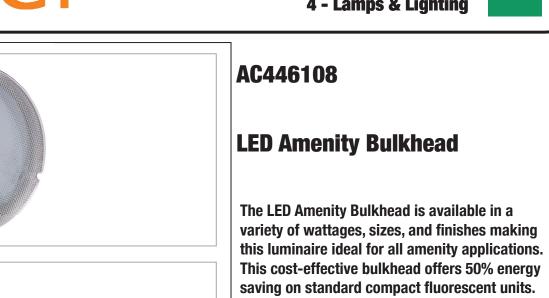

- Ideal for all amenity applications
- Polycarbonate shatterproof construction
- 20mm Conduit entry
- 20mm side & rear entry conduit

Technical Specification	
Power	14W
Construction	Polycarbonate Body and lens
Driver	BELL
LED Chip	Samsung
IP Rating	IP65
Operating Temp	-20°C to +35°C
Input Voltage	220 - 240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio
Colour Temp	4000K
Lumens	1500
Energy Savings	50%
Life	30000 Hours
 ¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio ² Exceeds EU standard of RA 80 for Colour Rendering Index ³ Subject to terms & conditions 	

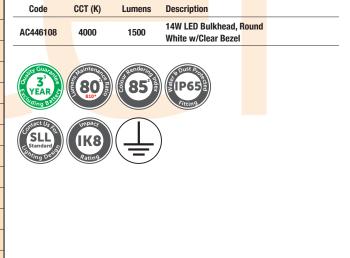

4_AC446108_2021_V1



www.electric-center.co.uk Electric Center are not responsible for the accuracy and contents of this datasheet. All displayed data and specification detail has been provided by the product manufacturer.