




## 4 - Lamps & Lighting



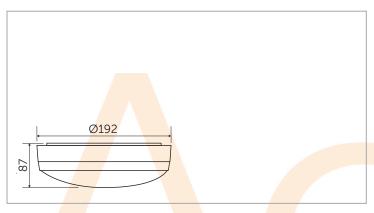

Technical Specific	eation			
Power	9W			
Construction	Polycarbonate Body and lens			
Driver	BELL			
LED Chip	Samsung			
IP Rating	IP65			
Operating Temp	-20°C to +35°C			
Input Voltage	220 - 240V			
Power Factor	> 0.9			
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index			
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio			
Colour Temp	4000K			
Lumens	900			
Energy Savings	44%			
Life	30000 Hours			
	f 70 for Lumens Maintenance Ratio f RA 80 for Colour Rendering Index			

## AC446123

## **LED Amenity Bulkhead**

The LED Amenity Bulkhead is available in a variety of wattages, sizes, and finishes making this luminaire ideal for all amenity applications. This cost-effective bulkhead offers 44% energy saving on standard compact fluorescent units.

- Ideal for all amenity applications
- Polycarbonate shatterproof construction
- 20mm Conduit entry
- 20mm side & rear entry conduit

Code	CCT (K)	Lumens	Description	
AC446 <mark>123</mark>	4000	900	9W LED Bulkhead, R <mark>ound</mark> Black w/Clear Bezel	





4\_AC446123\_2021\_V1

