


Ø192

87

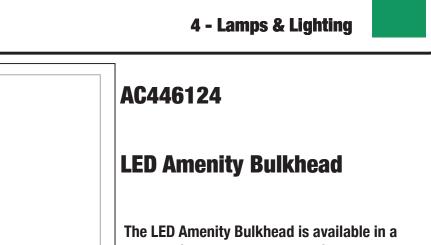

variety of wattages, sizes, and finishes making this luminaire ideal for all amenity applications. This cost-effective bulkhead offers 44% energy saving on standard compact fluorescent units.

- Ideal for all amenity applications
- Polycarbonate shatterproof construction
- 20mm Conduit entry
- 20mm side & rear entry conduit

Technical Specification	
Power	9W
Construction	Polycarbonate Body and lens
Driver	BELL
LED Chip	Samsung
IP Rating	IP65
Operating Temp	-20°C to +35°C
Input Voltage	220 - 240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio
Colour Temp	4000K
Lumens	900
Energy Savings	44%
Life	30000 Hours
 ¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio ² Exceeds EU standard of RA 80 for Colour Rendering Index ³ Subject to terms & conditions 	

CCT (K) Code Lumens Description 9W LED Bulkhead, Round AC446124 4000 900 White w/Clear Bezel

4_AC446124_2021_V1



www.electric-center.co.uk Electric Center are not responsible for the accuracy and contents of this datasheet. All displayed data and specification detail has been provided by the product manufacturer.