


4 - Lamps & Lighting



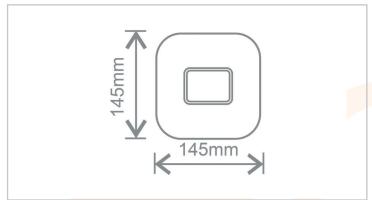

Technical Specification	
Wattage	9w
Lamp Cap	GR8
Voltage	220-240 Vac 50-60 Hz
Current	43 mA
CCT options	4000k
Nominal Luminous Flux	1050lm
Nominal Lifetime	30,000
Dimmable	No
Switching Cycles	50,000
Warm-up time to 60%	Instant full light
Diameter	145x145mm
Rated Peak Candelas	350
(cd)	
Power Factor	0.90
LMF at Nominal Lifetime	0.75
SDCM of CCT	<6
CRI	>83
Start Time	0.39s
Ambient Temperature	-20 to 40 degree
Emergency Module	AC44897 (Standard) and Self Testing (AC44863)
Retrofit	Yes

AC44886

9w LED DD lamp 2pin 4000k

Features and Benefits:

- For maximum energy savings, bypass all control gearand supply directly from the mains
- Save energy up to 65% compared with a fluorescent lampwith magnetic ballast
- Single side high lumen output for light onlywhere its needed
- Long life of 30,000h
- Compatible with emergency modules (Standard AC44897 and Self-testing AC44863)
- Instant start
- Negligible UV output
- Mercury free

4-AC44886-2021-V1

