


5 - Emergency Lighting, Fire & Safety

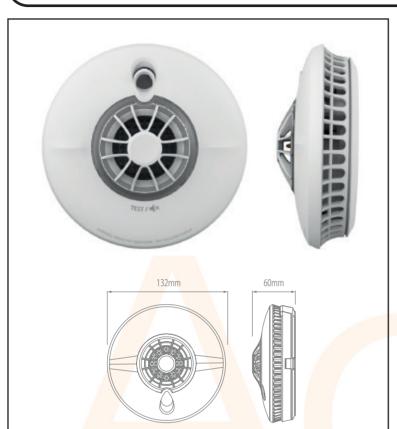

Technical Specification	
Supply voltage	3V DC
Battery back-up	10 year sealed for life Panasonic lithium
Technology	Thermistek Enhanced Thermal Sensor and Smart RF
Alarm sound level	85dB(A) at 3m (minimum)
Installation positions	Ceiling
Operating temperature	+4°C to +38°C
Operating humidity	Up to 90% RH non-condensing
Storage temperature	-20°C to +60°C
Storage humidity	Up to 93% RH non-condensing
Plastic material	ABS, UL94 VO fire retardant
Warranty	5 years
Master pack quantity	10
Weight	143g
Certified to	BS 5446-2: 2003
Operating Frequency	868 MHz

AC5194

BATTERY POWERED ENHANCED HEAT ALARM

- Smart RF Ready Fit a Smart RF Radio Module (AC5223) to wirelessly interlink up to 50 Smart RF products
- Thermistek technology as used by over 90% of the UK Fire and Rescue Services
- Enhanced thermal sensor predicts when the temperature will rise to a dangerous level
- Easily accessible central button Test / Smart Silence / Locate
- Silence function allows the alarm to be silenced in the event of a known false alarm
- Suitable to protect the most dangerous room within a home, a kitchen.
- Grade F1 as per BS 5839-6:2019

5-AC5194-2021-V1

