


5 - Emergency Lighting, Fire & Security



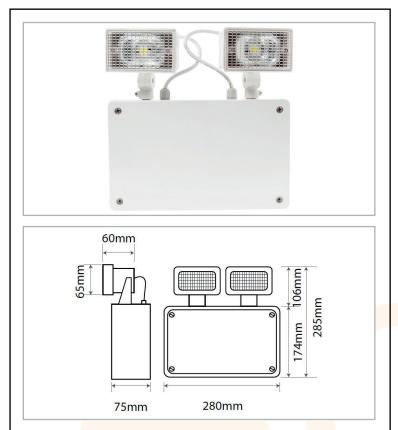

Technical Specification	
Attribute	Value
Light Source	15w SMT LED (Comined)
IP Rating	IP65
Emergency Duratuion	3-Hour (Minimum)
Mains Voltage	230v 50Hz ± 10%
Mains Current	Max) 150mA 35mA quiescent
Recharge Period	Less than 24 Hours
Charge Indicator	Integral Green LED
Changeover Voltage	As per requirements of BS EN 60598-2-
Temperature Range	0 TO 40 °
Weight	200gm
Battery	LiFePo4 3.2v 6000mAh
Lumen Output	720Lm (Combined)

AC55696

Emergency Twin Spot

Features and benefits

battery technology, LiFePo4.

The AC55696 is an LED non-maintained IP65 twin spot environmentally friendly emergency light. The AC55696 has a high lumen output (720Lm) which combined with the enhanced lenses gives excellent spacing ratios. The inbuilt green charge LED gives great visibility of the charging state of the fitting. The AC55696 benefits from the latest lithium

Features

Smart Test remote control testing compatible
Non-maintained
Long life LED technology
Non -maintained 3 hour emergency backup
LiFePo4 Battery
Low environmental impact
Low maintenance
Meets BS EN 60598-2-22 and other relevant
standards
Enhanced optical performance gives excellent
spacing distances
Can be mounted in any orientation.

9-AC92050-2022-V1

