




6 - Ventilation & Heating



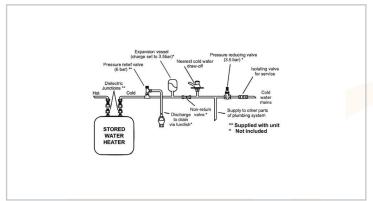

Technical Specification	
Vessel Capacity:	2 litres
Vessel Charge:	3.5bar
Max. Vessel Charge:	10bar
Vessel Connection:	3/4" male threaded
PR+LS Setting Range	1 to 6bar
PR+LS Factory setting	3bar
PR+LS Max. Temp.	40°C
PR+LS Connection	DN15 3/4" female (ISO 228-1)
Check Valve Connection:	15mm compression

AC6032

Cold Water Control Pack

 For use with unvented stored water heaters when the hot water expansion cannot be accommodated by the installation pipework

Comprises:

- Combined pressure reducer and line strainer valve
- Separate 15mm check valve
- 2 litre capacity expansion vessel

6-AC6032-2021-V1

